



佳捷官网



佳捷官微



企业征信

## 唐山佳捷包装机械制造有限公司

Tangshan Jiajie Package Machinery Manufacturing Co., Ltd.

地址：河北省唐山市玉田县彩亭桥镇东王庄村（彩亭桥工业园区）

电话：0315-6167298/6134867

传真：0315-6134867 邮编：064100

销售热线：0315-6167298/6134867

网址：www.ytjiajie.com

邮箱：mailytjiajie@126.com

国际业务：+86-315-6195018

外贸邮箱：sales@ytjiajie.net

ADD: Caitingqiao Industry Zone Yutian County Tangshan City  
Hebei Province

Tel: +86-315-6167298/6134867

Fax: +86-315-6134867 P.C. 064100

Sales Tel: +86-315-6167298/6134867

Web: www.ytjiajie.net

E-mail: mailytjiajie@126.com

International Bussiness Tel: +86-315-6195018

International Bussiness Mail: sales@ytjiajie.net

注：产品外观及参数如有变化，恕不另行通知。  
Note: Subject to changes without notice.

JJ-2025-09




# 佳捷®

JIAJIE MACHINE

## 全自动印后联机专业制造商

Professional manufacturer of automatic post-press in-line

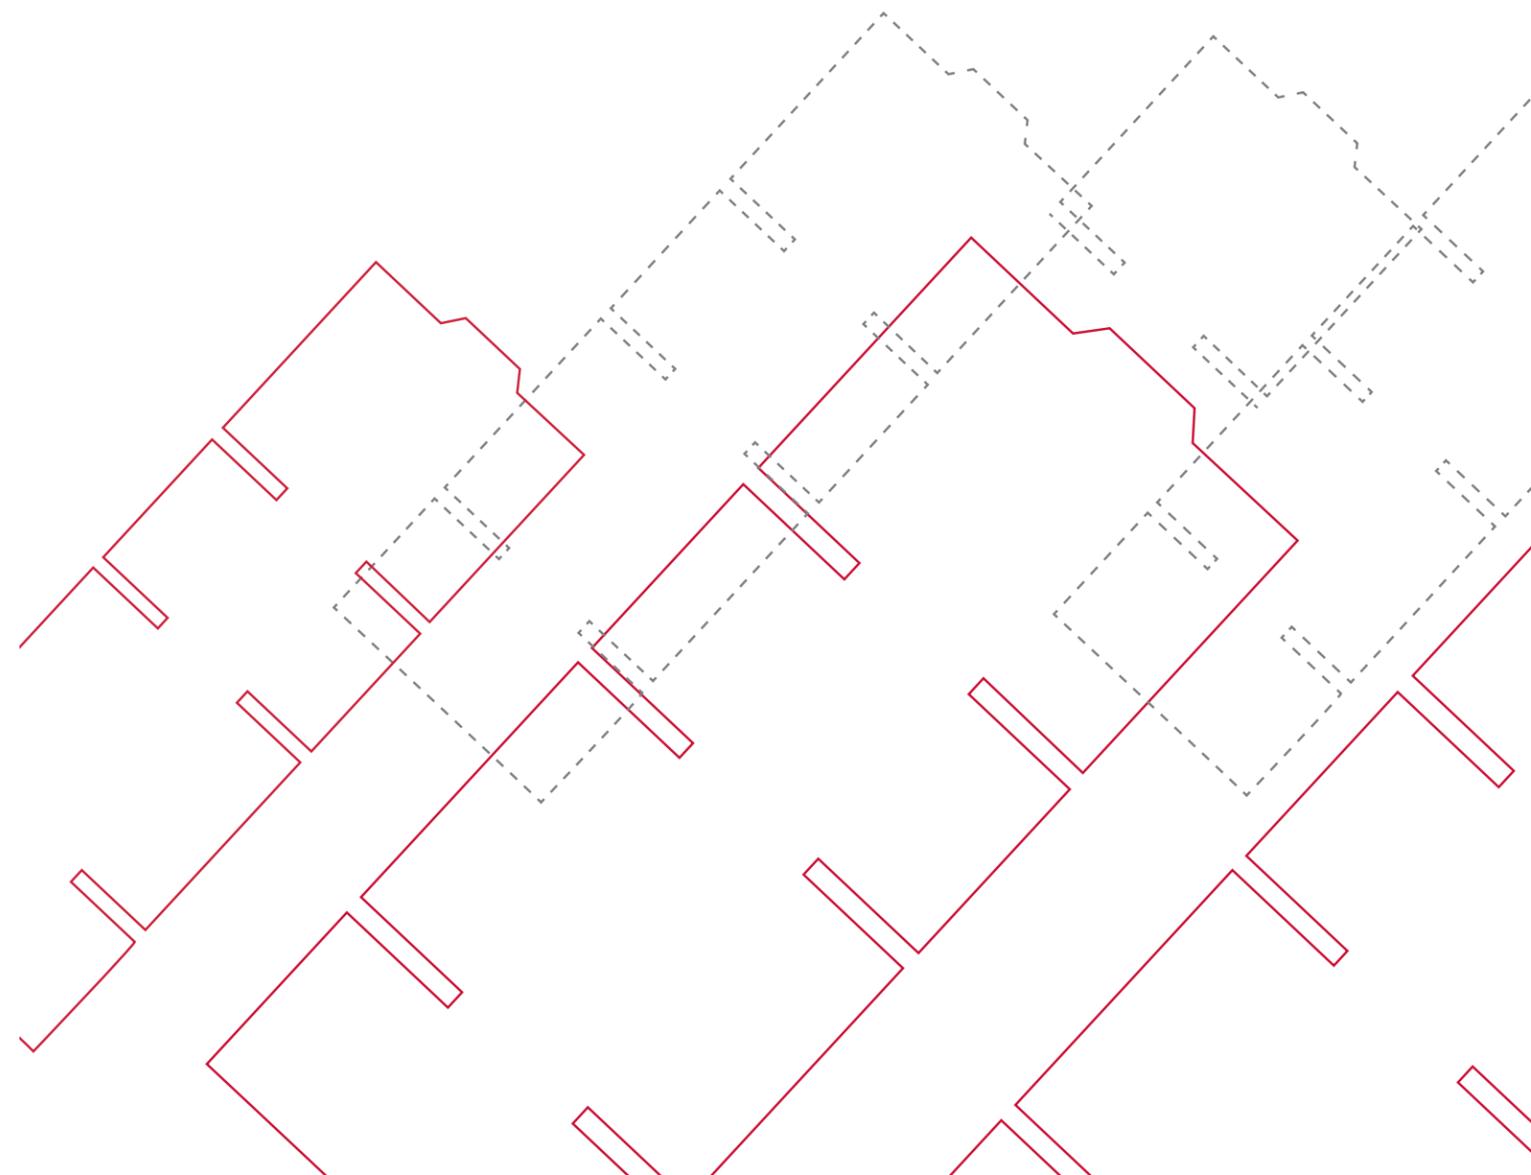

# Company Profile 公司简介

## → 企业核心价值观 / ENTERPRISE CULTURE

奋  
勇  
前  
行  
 立  
场  
坚  
定  
 持  
续  
创  
新  
 团  
队  
协  
作  
 诚  
信  
感  
恩  
 客  
户  
至  
上

## → 资质证书 / CERTIFICATE



唐山佳捷包装机械制造有限公司坐落于中国北方印机之乡 ----- 河北玉田，是一家集研发、制造、销售、服务为一体的企业。

公司成立于2009年5月，历经十几年的发展，公司生产的糊箱机，打包机，全自动钉箱机联线等一系列包装机械产品已经达到国内领先水平，不仅畅销全国，还远销美国、俄罗斯、巴西、马来西亚、越南、墨西哥、波兰、芬兰、印度等多个国家和地区。

公司已经通过了ISO 9001:2015 质量管理、ISO45001:2018 职业健康安全管理、ISO14001:2015 环境管理三体系认证并被河北省科技厅授予高新技术企业。

同一价位，品质更好；同一品质，服务更优！佳捷人愿以更高的标准，更优良的品质，更合理的价位，更完美的服务，与海内外朋友携手共进，共创美好明天。

Tangshan Jiajie Package Machinery Manufacturing Co., Ltd is located in China's North Printing Machinery Production Base - Yutian, Hebei. It is a colligated enterprise integrating design, manufacture and sales together.

The company was founded in may 2009,Through more than ten years hard working and experience accumulation, the quality and technique we used in our folder gluer machine,bundling machine,automatic stitching machine has reached high international level and sold to domestic market and other countries-USA, Russia, Brazil, Malaysia, Vietnam, Mexico, Poland,Finland, India etc- many countries and regions.

Our company has passed the ISO 9001:2015 quality management certification, ISO45001:2018 occupational health and safety management certification, and ISO14001:2015 environmental management certification. Our company has been awarded a high-tech enterprise by the Hebei Provincial Department of Science and Technology.

Tangshan Jiajie Package Machinery Manufacturing Co., Ltd is willing to establish long-term cooperation relationship with all customers from domestic and abroad for mutual benefit and development with our high quality products, good after-sale services at reasonable competitive price.

Let's work together for our friendship and future!



# QUALITY ASSURANCE 品质保证



## 愿景 / Vision

**公司使命:** 专注客户价值, 做优质产品服务社会, 为中国民族工业发展奋斗终生。

**公司愿景:** 致力成为全球包装机械行业的领跑者。

**公司价值观:** 客户至上、诚信感恩、团队协作、持续创新、立场坚定、奋勇前行。

**Company mission:** Focus on what we can brought to our customers! High quality products to serve the world!

**Vision:** To be the leading machine manufacturer in packaging machinery industry.

**Company values:** Customer first! Honest and gratitude ! Cooperation! Innovation ! Professional and hard working!

# Team Built 员工成长

## 人才培训 / Training

佳捷实施高效实用的人力资源发展战略, 加强高绩效组织和高绩效文化建设, 持续加强人力资源发展的长线投入, 优化人才结构, 不断加强人力资源管理实践和制度建设, 提升公司人力资源管理能力, 为公司业务的稳健发展提供持续稳定的人才保证。

Jiajie adopts efficient and practical human resources development strategy to strengthen the construction of high performance organization and high performance culture; strengthen continuous long-term investment on human resources development; optimize the structure of talents, strengthen human resources management practice and system construction, improve the company human resource management ability, provide a steady guarantee of talents for the healthy development of the company .

通过各项人力资源策略的实施, 使得我们拥有了一支充满激情、智慧、专业、高度关注客户并极富协作精神的员工队伍, 以支撑客户与公司业务的高速发展。

Through the implementation of all kinds of human resources strategy, we are aimed at creating a team who is always full of passion, wisdom, professional, attention to customer with highly collaborative spirit to meet the high speed development demand from the customers.



## 客户价值 / Customer value

公司在发展中着重客户价值的体现。

Customer value: We are always eyeing what we can brought to our clients when we do things.

公司做产品的理念是心系客户为客户创造价值, 与客户共同成长。

Idea: Make profit for customer and grow up with customer.



# JHXDX-2800-A1 型 全自动钉箱机

Automatic Folder Gluer and Stitcher

## 技术参数 Specification

型号	Model	JHXDX-2800-A1
整机功率	Total Power	≤ 23 (变频调速 Speed control by inverter)
适用纸张范围	Applicable paper range	A B C AC BC 瓦楞纸板, 三层, 五层瓦楞纸板 A B C AC BC flute, 3-ply and 5- ply corrugated sheet
机器净重	Machine Net Weight	≈ 11T
整机占地尺寸	Dimension	18000*4200mm
钉距范围	Nail Distance Range	30-500mm
打钉角度	Nail Angle	45°
气源标准	Air Source Standard	0.6-0.8Mpa
电源	Power Supply	三相五线制 (3P 5W) 380V 50Hz




## 设备购买理由 Features of the machine

- |                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>1. 纸箱成型速度快, 效果好。</li> <li>2. 前沿 6 个可调吸风口, 送纸准确。</li> <li>3. 二次压痕, 折纸准确。</li> <li>4. 大小口控制良好, 减少废品率。</li> <li>5. 采用小臂整理功能, 换单快。</li> <li>6. 送丝机采用智能化送丝, 对丝轮磨损小。</li> <li>7. 操作系统采用 PLC、人机界面, 主要动力采用伺服电机, 使设备操作简单, 稳定可靠。</li> </ol> | <ol style="list-style-type: none"> <li>1. Fast folding.</li> <li>2. Accurate vacuum feeding.</li> <li>3. Re-creasing for more accurate folding.</li> <li>4. Good control on fish tail phenomenon to decrease the waste.</li> <li>5. With the arm sorting function, the order can be changed quickly.</li> <li>6. The wire feeder adopts intelligent wire feeding, which has little wear on the wire wheel.</li> <li>7. The operating system adopts PLC, man-machine interface, and the main power adopts private servo motor, which makes the equipment operation simple, stable and reliable.</li> </ol> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 纸板规格 Sheet Specification

钉箱	E	A=C	B=D	F	G
最大 (mm) Max	2800	810	575	1200	40
最小 (mm) Mini	860	230	150	300	35
粘箱	E	A=C	B=D	F	G
最大 (mm) Max	2800	1150	700	1200	40
最小 (mm) Mini	730	200	100	300	35

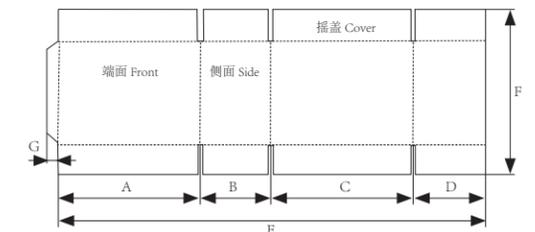

# JHXDX-2800-B1 型 全自动钉箱机

Automatic Folder Gluer and Stitcher



## 设备特点 Features of the machine

- |                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>1. 适合 A.B.C.AC.BC 楞, 三层、五层单片纸箱钉合、粘合。</li> <li>2. 钉距范围: 30-500mm。</li> <li>3. 打钉角度: 45 度。</li> <li>4. 单钉、双钉可自由调整, 适用国标 17 ( 1.9x0.75mm )、18 ( 1.81 x 0.71mm ) 号钉丝。</li> </ol> | <ol style="list-style-type: none"> <li>1.1.Suit for A, B, C, AC, BC flute and 3 layer, 5 layer corrugated carton paste and stitch.</li> <li>2.Stitching pitch range:30-500mm.</li> <li>3.Stitching angle: 45 degree.</li> <li>4.Single or double stitch, in compliant with international standard 17 or 18 size nail.</li> </ol> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 设备购买理由 Features of the machine


- |                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>1. 纸箱成型速度快, 效果好。</li> <li>2. 前沿 8 个吸风可调, 且送纸准确。</li> <li>3. 七次压痕加折纸刀使折纸更准确。</li> <li>4. 折叠部整体加固, 大小口控制良好, 减少废品。</li> <li>5. 采用小臂整理功能, 换单快, 纸张整齐度好。</li> <li>6. 送丝机采用智能化送丝, 对丝轮磨损小。</li> <li>7. 操控系统采用 PLC、人机界面, 主要动力采用伺服电机, 使设备操控简单, 稳定可靠。</li> </ol> | <ol style="list-style-type: none"> <li>1.Fast folding.</li> <li>2.8 Volume adjustable vacuum feeding belts ensures accurate feeding.</li> <li>3.Seven times re-creasing and folding knife get a more accurate folding.</li> <li>4.Good control on fish tail phenomenon to decrease the waste.</li> <li>5.Machine has sheet separation and registration unit, fast order change and neat folding and gluing.</li> <li>6.Using intelligent wire feeding system with less wire wheel wearing.</li> <li>7.PLC, HMI and main Servo motor make the operation of the machine simple and stable.</li> </ol> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 技术参数 Specification

型号	Model	JHXDX-2800-B1
安装面积	Installation Area	18000×4100mm
整机功率	Power Required	≤23Kw
气压	Air Pressure	0.6-0.8Mpa( 买方提供 Buyer provide )
电源	Power	三相五线制 ( 3P 5W ) 380V 50HZ
重量	Weight	11.7T

## 纸板规格 Sheet Specification

钉箱	E	A=C	B=D	F	G
最大 ( mm ) Max	2800	810	575	1200	40
最小 ( mm ) Mini	860	230	150	300	35
粘箱	E	A=C	B=D	F	G
最大 ( mm ) Max	2800	1150	700	1200	40
最小 ( mm ) Mini	730	200	100	300	35

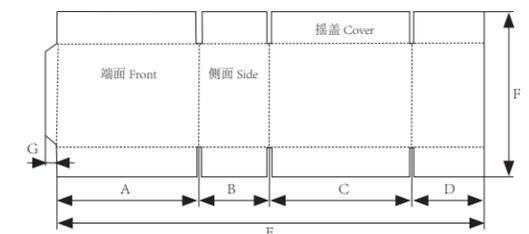

# JHXDX-3200/4000/4500 型 全自动钉箱机

Automatic Folder Gluer and Stitcher



## 设备特点 Features of the machine


- |                                                                  |                                                                                            |
|------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| 1. 适用纸张范围: A、B、C、AB、BC 瓦楞纸板, 三层、五层瓦楞纸板。                          | 1.1.Suit for A, B, C, AB,BC flute and 3 layer, 5 layer corrugated carton paste and stitch. |
| 2. 钉距范围: 30-500mm。                                               | 2.Stitching pitch range:30-500mm.                                                          |
| 3. 打钉角度: 45 度。                                                   | 3.Stitching angle: 45 degree.                                                              |
| 4. 最高钉箱速度: 1800mm/s。                                             | 4. The highest nail box speed: 1800mm/s.                                                   |
| 5. 钉数: 1-99。                                                     | 5. Number of nails: 1-99.                                                                  |
| 4. 单钉、双钉可自由调整, 适用国标 17 ( 1.9x0.75mm ) 、18 ( 1.81 x 0.71mm ) 号钉丝。 | 6.Single or double stitch, in compliant with international standard 17 or 18 size nail.    |

## 设备购买理由 Features of the machine

- |                                                |                                                                                                      |
|------------------------------------------------|------------------------------------------------------------------------------------------------------|
| 1. 纸箱成型速度快, 效果好。                               | 1.Fast folding.                                                                                      |
| 2. 前沿 8 个吸风可调, 且送纸准确。                          | 2.8 Volume adjustable vacuum feeding belts ensures accurate feeding.                                 |
| 3. 七次压痕加折纸刀使折纸更准确。                             | 3.Seven times re-creasing and folding knife get a more accurate folding.                             |
| 4. 折叠部整体加固, 大小口控制良好, 减少废品。                     | 4.Good control on fish tail phenomenon to decrease the waste.                                        |
| 5. 采用小臂整理功能, 换单快, 纸张整齐度好。                      | 5.Machine has sheet separation and registration unit, fast order change and neat folding and gluing. |
| 6. 送丝机采用智能化送丝, 对丝轮磨损小。                         | 6.Using intelligent wire feeding system with less wire wheel wearing.                                |
| 7. 操控系统采用 PLC、人机界面, 主要动力采用伺服电机, 使设备操控简单, 稳定可靠。 | 7.PLC, HMI and main Servo motor make the operation of the machine simple and stable.                 |

## JHXDX-3200-A 型纸板规格 Sheet Specification

	E	A=C	B=D	F	G
最大 ( mm ) Max	3200	1100	720	1600	40
最小 ( mm ) Mini	1160	340	240	400	35

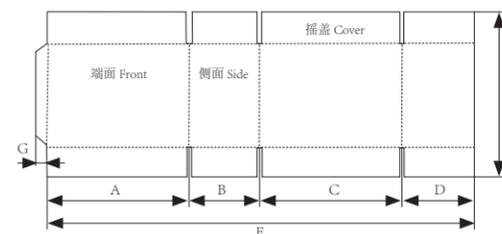


## 技术参数 Specification

型号	Model	JHXDX-3200/4000/4500
气源标准	Air Source Standard	0.6-0.8Mpa ( 客户提供 )
整机功率	Power Required	≤42KW ( 变频调速 )
气压	Air Pressure	0.6-0.8Mpa( 买方提供 Buyer provide )
电源	Power	三相五线制 ( 3P 5W ) 380V ± 10% 50HZ( 客户提供 )
机器净重	Weight	≈ 11.7T
整机占地尺寸	Dimension	25000mmX5000mm


## JHXDX-4000-A 型纸板规格 Sheet Specification

	E	A=C	B=D	F	G
最大 ( mm ) Max	4000	1300	700	2500	40
最小 ( mm ) Mini	1200	400	240	500	35

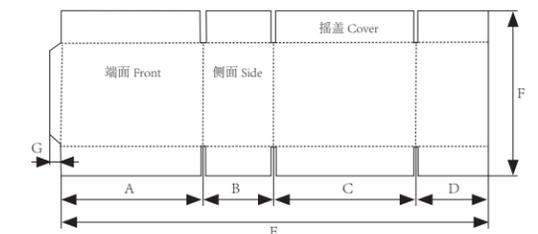

## JHXDX-4500-A 型纸板规格 Sheet Specification

	E	A=C	B=D	F	G
最大 ( mm ) Max	4500	1800	800	2600	40
最小 ( mm ) Mini	1200	400	270	500	35

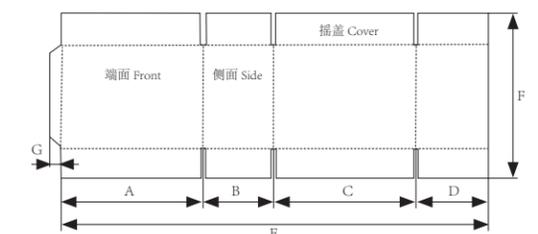


# JHX-2800-A2 型 全自动糊箱机

Automatic Folder Gluer

## 设备购买理由 Features of the machine


- |                 |                                                                                                       |
|-----------------|-------------------------------------------------------------------------------------------------------|
| 1、纸箱成型速度快。      | 1.Fast folding.                                                                                       |
| 2、前沿吸风送纸准确。     | 2.Accurate vacuum feeding.                                                                            |
| 3、二次压痕，使折纸更准确。  | 3.Re-creasing for more accurate folding.                                                              |
| 4、大小口控制良好，减少废品。 | 4.Good control on fish tail phenomenon to decrease the waste.                                         |
| 5、无极调速，二次纠偏。    | 5.Stepless speed regulating together with secondary Correction to eliminate the fish-tail phenomenon. |
| 6、计数准确。         | 6.Accurate Counting.                                                                                  |
| 7、拍打部使纸箱成型好。    | 7.Flapping part make a tidy stacking.                                                                 |
| 8、出堆准确整齐。       | 8.The stack is accurate and neat.                                                                     |

二次压痕部  
Re-creasing Part

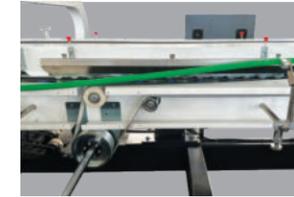

第二次加强纸板压痕线，使折纸位置更准确，纸张不破裂，折痕美观。  
To strengthen the creasing to make the folding more accurate and tidy without paper break.

二次纠偏部  
Secondary Correction Part

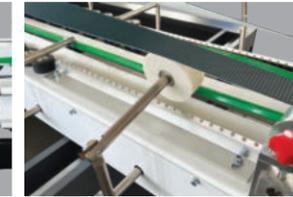

彻底消除大小口，合格率更高。  
To eliminate the fish-tail for a better yield.

差速纠偏部  
Correction by Differential Speed



差速纠偏，折叠更美观。  
Using belt speed differences to correct the folding again!

收纸整形部  
Auto Stacking And Counting part



成品箱自动计数、整形、堆积整齐，准码输出，堆积速度 115 米 / 分。  
The finished products are counted, stacked and unified here.



## 技术参数 Specification


型号	Model	JHX-2800-A2
最大纸板规格	Max. Sheet Size	2800×1200mm
最小纸板规格	Mini.Sheet Size	640×300mm
安装面积	Installation Area	14000×4100mm
需要动力	Power Required	7.9KW
重量	Weight	6T

## 纸板规格 Sheet Specification

	2600	E	A=C	B=D	F	G
最大 (mm) Max	2500	900	800	1200	40	
最小 (mm) Mini	640	190	100	300	35	

	2800	E	A=C	B=D	F	G
最大 (mm) Max	2800	1100	800	1200	40	
最小 (mm) Mini	640	230	100	300	35	

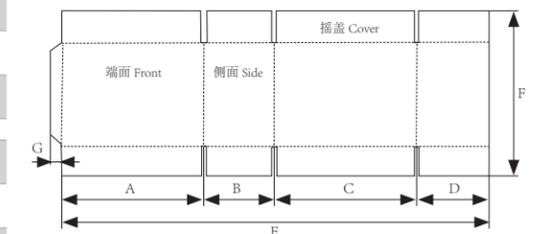

# JDB-1400D-T 全自动双头捆扎机 (推杆型) -PE

Automatic Twin-head PE Bundling Machine(Pusher Type)




## 技术参数 Specification (Top falling type)

型号	Model	JDB-1400D-T
整机功率	Total Power	2KW
适用纸张范围	Applicable paper range	A、B、C、AB 瓦楞纸板, 三层、五层瓦楞纸箱 A, B, C, AB flute, 3-ply and 5-ply corrugated sheet
机器净重	Machine Net Weight	≈ 2T
整机占地尺寸	Dimension	3800mm*3400mm*2000mm
气源标准	Air Source Standard	0.6-0.8 MPa, 0.36m³/min
电源	Power Supply	三相五线制 (3P 5W) 380V 50Hz
最大纸板规格	Max. Sheet Size	1400*1200*300mm
最小纸板规格	Mini.Sheet Size	300*300*50mm
打包速度	Packing Speed	18-20 包 / 分 ( Packages/Min )

# JDB-1000M 半自动捆绑机 -PE

Semi-automatic PE Bundling Machine

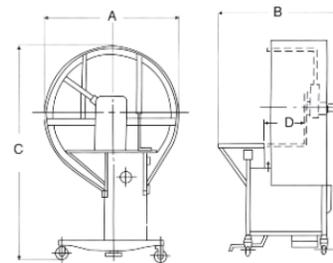


自动结束带打结式  
Automatic Bounding Band Knotting

- 节省时间、物力、人力。
- 易操作 (无经验者也能操作)。
- 不同大小包装无需调整。
- 安全、不费心的操作。
- Time, cost and manpower saving.
- Easy for operation, no need for special training.
- No need to adjust different size bundling
- Safe and simple operation.

# JDB-PZ-1300 双头智能打包机 (PP带)

Smart Type Automatic Twin-head Bundling Machine (PP Rope)

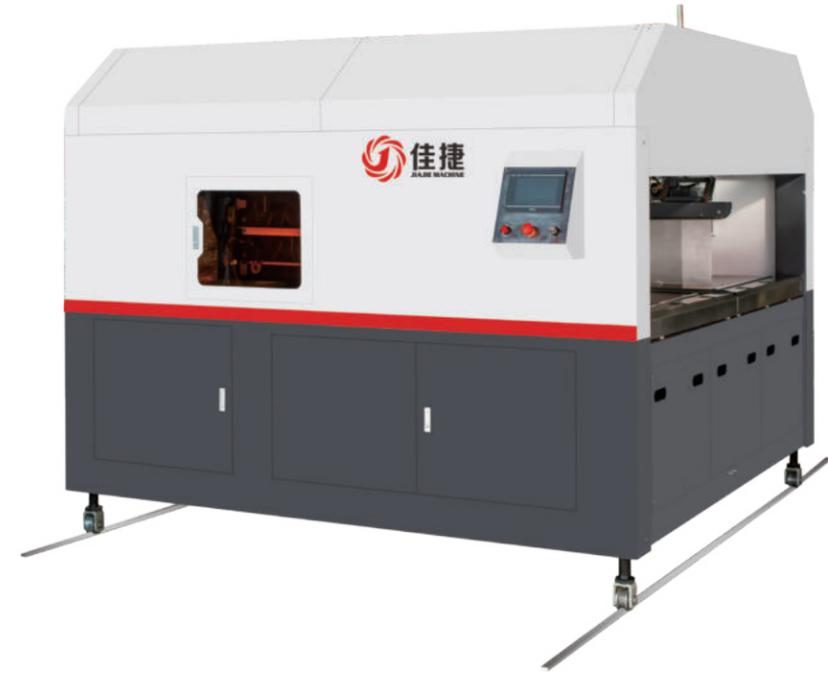

## 设备购买理由 Features of the machine

1. 采用整体骨架结构, 钢性好结构紧凑操作简单方便生产效率高, 最高打包速度可以达到 20 包 / 分钟。
2. 减少员工劳动强度。
3. 采用 PLC 电脑编程控制器、伺服电机、触摸屏控制, 实现智能识别被打包物的外形尺寸及力矩控制, 通过系统内部运算后发出指令来调整设备的各部尺寸。
4. 本机安全系数高, 所有开门都设有安全保护功能, 使操作人员和机器的安全得到很好的保障。
5. 采用 PP 带打包, 能使被打包物不破损, 打包紧外观美观。

1. Machine adopts integrated frame structure, with features of good rigidity, compact structure, easy operation and high production efficiency, the maximum bundling speed can be up to 20 packages per minute.
2. Saving labors and increasing yield.
3. Machine adopts PLC programmable controller, servo motor and touch screen control, it can achieve intelligent identifying of the subject size and control the bundling force moment, it will adjust each part to correct position through installed system.
4. High safety standard, each door is equipped with limit switch. Machine will not work when they are open to protect the operator and machine.
5. PP rope bundles the subject with less damage to its surface, compact and good looking.

## 技术参数 Specification

型号	Model	JDB-PZ-1300
焊接形式	Melting Method	热焊接 ( Heating )
打包带宽度	Rope Width	5mm
打包带厚度	Rope Thickness	0.35-0.55mm
带卷直径	Rope Stocker Diameter	内径 ( Inner Diameter ) $\Phi=200\text{mm}$ 外径 ( External Diameter ) $\Phi=380\text{mm}$
传送速度	Transmit speed	0.15-0.8m/s ( 变频调速 frequency control )
整机重量	Total Weight	1500Kg
整机功率	Total Power	6.7Kw
电源	Power Supply	三相五线制 ( 3P 5W ) 380V 50HZ
双机头工作	Double Head Working	A 最小 Min.400mm A 最大 Max.1450mm C 最小 Min.240mm
单机头工作	Single Head Working	A 最小 Min.200mm A 最大 Max.1450mm C 最小 Min.240mm